


Walk on sunshine.

Our new PV cables SUNCONNECT ensure uninterrupted energy flow, just like the sun's unwavering rise.



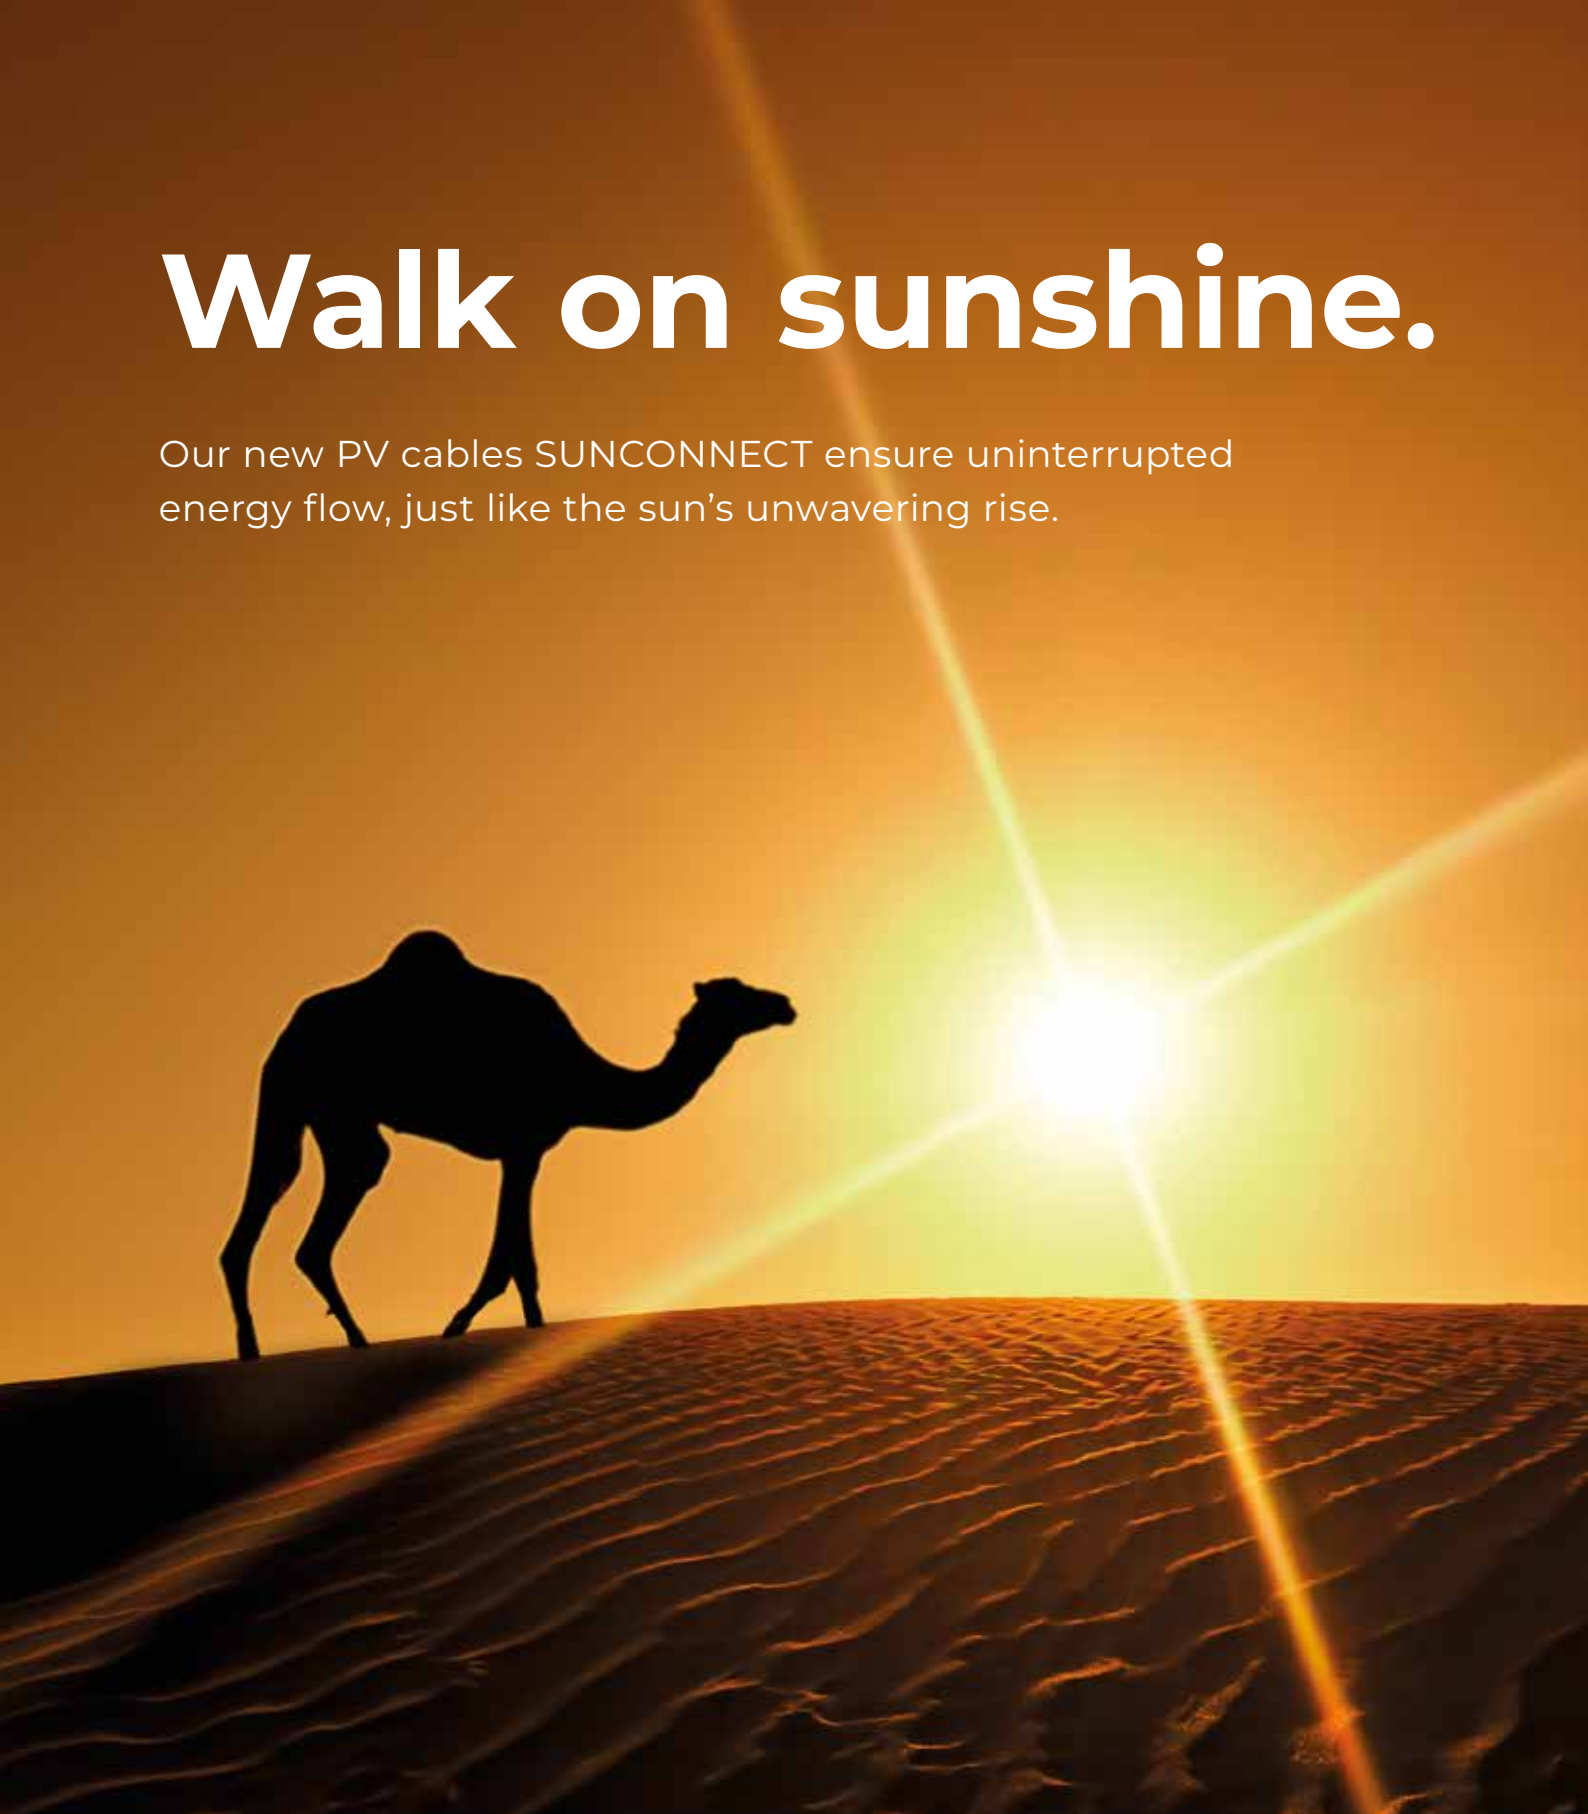

Our new PV cables SUNCONNECT ensure uninterrupted energy flow, just like the sun's unwavering rise.

With a cross-linked XLPE insulation, our new range of lead-free SUNCONNECT PV solar cables, demonstrate very high resilience against high temperatures and UV-exposure. Not to mention their stunning dielectric strength. Designed for AC/DC applications and completely compatible with new smart inverters and related external equipment, steadfast SUNCONNECT will not desert your solar plants.



AC/DC

Designed for 1.8/3(3.6) kV AC |
1.5/1.5(1.8) kV DC.




High dielectric strength

XLPE cross-linked insulation makes the cable highly resilient to electrical stress.



Reaction to fire

Flame-retardant according to IEC 60332-1 series of standards.



Aluminium core

XLPE insulation

PVC outer sheath



Weatherproof

Designed to be used both indoors and out, in rain as well as in insisting sunshine.



Complete compatibility

Designed to connect PV panel strings with smart inverters, combiner boxes and the utility grid.



Night-time resilience


Engineered to withstand reverse current flow during night-time or low-light conditions.

Click or scan QR-code for →
complete product information



PRYSMIAN

Offices Romania
Strada Dragănești, Nr. 28,
Slatina, 230119
infocables-ro@prysmian.com



ro.prysmian.com

© All rights reserved by Prysmian 2024-01 | Version 2.

Technical data, dimensions and weights are subject to change. All sizes and values without tolerances are reference values. Specifications are for product as supplied by Prysmian: any modification or alteration afterwards of product may give different result. The information contained within this document must not be copied, reprinted or reproduced in any form, either wholly or in part, without the written consent of Prysmian. The information is believed to be correct at the time of issue. Prysmian reserves the right to amend this specification without prior notice. This specification is not contractually valid unless specifically authorised by Prysmian.

Follow us

